

PROJECT NAME	ASUS_B1503CVA
BENCHMARK VERSION	1.0.0.17
COMPLETION DATE	2025-05-26 01:29:15
ITERATIONS	8
SYSTEM CONDITIONING	True

SUMMARY

BATTERY LIFE

6 HR 27 MIN

BATTERY START PERCENTAGE

100 %


DC PERFORMANCE

1011

MOBILEMARK 30 INDEX

391

BATTERY LEVEL

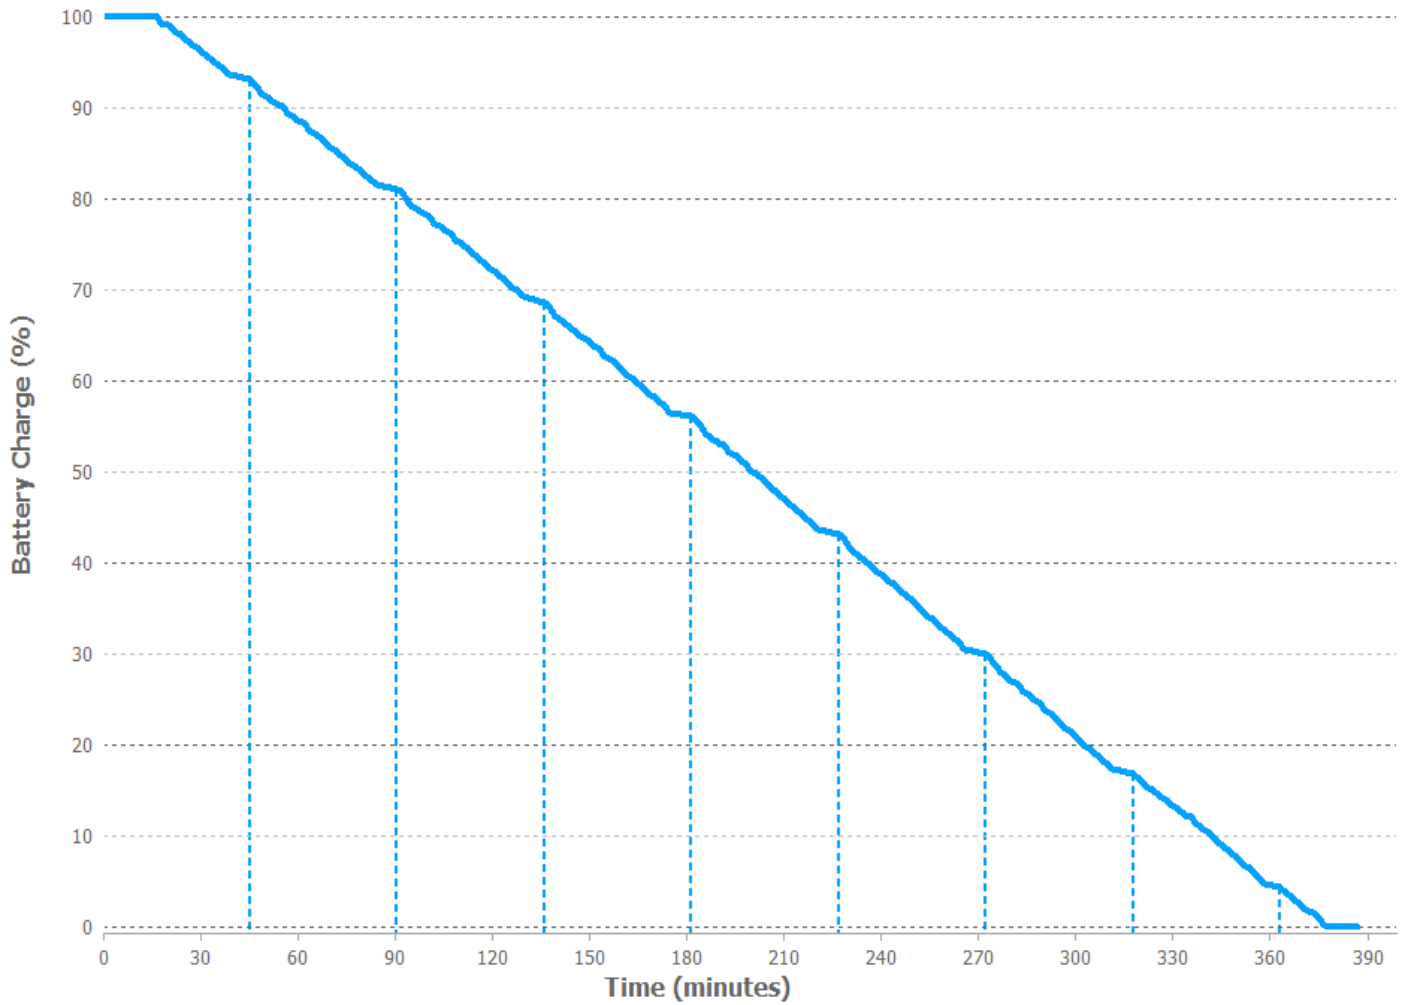

PROFESSIONAL PERFORMANCE

ITERATIONS	ITER 1	ITER 2	ITER 3	ITER 4	ITER 5	ITER 6	ITER 7
SCORES	1015	1002	1018	1023	1013	1018	991

SYSTEM INFORMATION COMPARISON TABLE

System Info	This System	Calibration System
BIOS	ASUSTeK COMPUTER INC. (Licensed by AMI, LLC.) B1503CVA.307.T02 4/24/2025	LENOVO N3QET38W (1.38) 9/15/2023

Core + Memory

Motherboard type	B1503CVA	21HDCTO1WW
CPU	Intel(R) Core(TM) 3 100U, 1200 MHz, 6 Cores(s), 8 Logical Processor(s)	13th Gen Intel(R) Core(TM) i5-1345U, 1600 MHz, 10 Cores(s), 12 Logical Processor(s)
Memory Size	16.00 GB, 2 Channel, 5200 MHz	32.00 GB, 2 Channel, 5200 MHz
Virtual Memory	18.49 GB Total, 13.93 GB Free	36.41 GB Total, 31.32 GB Free
Virtualization	Enabled in hardware	Enabled in hardware
Secure Boot	Secure Boot State:On	Secure Boot State:On

Video

Resolution	1920 x 1080 x 60 hertz	1920 x 1200 x 60 Hertz
Brightness	100%	95%
Brightness Profiler	False	False
GPU 0	Intel(R) Graphics (version: 32.0.101.5972)	Intel(R) Iris(R) Xe Graphics (version: 31.0.101.4502)

Storage

Drive 0	238.00 GB (256052966400 bytes) NVMe WD PC SN740 SDDPNQD-256G-1006	238.00 GB (256052966400 bytes) WD PC SN740 SDDQNQD - 256G - 1201
Policies	Write caching: Default; Power protected: Default	Write caching: Default; Power protected: Default

Battery

Battery 0	ASUSTeK ASUS Battery ASUSTeKASUS Battery	SMP 5B10W51864 1992SMP5B10W51864
Design Capacity	50014 mWh	52500 mWh
Full Capacity	50074 mWh	52500 mWh
Battery Health	100%	100%
Cycle Count	3	25



Operating System

OS Type	Microsoft Windows 11 Pro Education	Microsoft Windows 11 Pro
OS Version	10.0.26100.4061	10.0.22621.2428
Bitlocker	Volume C: Protection Off	Volume C: Protection Off
Tamper Protection	Enabled	Enabled
Windows Defender Antivirus	Enabled	Enabled
Windows Security Center	Enabled	Enabled
Power Policy	BAPCo MobileMark 30	BAPCo MobileMark30
Power Mode	Balanced	Balanced
Power Source	DC	DC
Dark Mode (MobileMark/OS)	Disabled/Disabled	Disabled/Disabled
Virtualization-based Security	Enabled	Enabled
Memory Integrity	Enabled	Enabled

BAPCO® MISSION

Business Applications Performance Corporation (BAPCo®) is a non-profit consortium with a charter to develop and distribute a set of objective performance benchmarks for personal computers based on popular computer applications and industry standard operating systems.

ABOUT THE CALIBRATION SYSTEM

The calibration system is a system chosen as a reference point for all other MobileMark® 30 results. BAPCo chose the configuration above for its wide availability and its representation of a typical mainstream PC at the time of release of MobileMark 30.

MobileMark® has been calibrated in such a way that a PC with performance equivalent to this calibration system for a given workload will have a performance rating of 1000. A system twice as fast as the calibration system on a given workload (or, equivalently, that responds in half the time on average) will have a performance rating of 2000. This is true for both overall ratings and scenario ratings.

ABOUT THE MOBILEMARK 30 INDEX

The MobileMark Index score combines the Battery Life score and the DC Performance score into a single metric, showing the balance between battery life and performance. A higher MobileMark Index value is better.

$$\text{MobileMark Index} = \frac{\text{Battery Life} * \text{DC Performance}}{1000}$$